

Technical Data Sheet

	DOWSIL™ 9046 Silicone Elastomer Blend
	INCI Name: Cyclopentasiloxane (and) Petrolatum (and) Dimethicone Crosspolymer
Features & Benefits	 Opaque gel Easy to formulate Acts as a thickening agent for w/o formulations, cyclomethicones and other silicone fluids Not tested on animals Smooth skin feel Semi-occlusive property Cold processing USP graded petrolatum
Applications	• Skin care, color cosmetics, sun care, antiperspirants and deodorants.
Typical Properties	


Specification Writers: These values are not intended for use in preparing specifications.

CTM ¹	Property	Unit	Result
0176	Appearance	Pass	White, opaque
0050	Viscosity	сР	75,000
0208	NVC	%	23.8

1. CTM: Corporate Test Method, copies of CTMs are available on request.

Description DOWSIL[™] 9046 Silicone Elastomer Blend is an intimate mixture of petrolatum, cyclomethicone and silicone elastomer. This special blend has a semi-occlusive property due to the presence of the petrolatum while having the non-greasy, smooth feel of silicone elastomer and therefore could help in moisturizing the skin.

DOWSIL[™] 9046 Silicone Elastomer Blend can be incorporated directly with other oil-phase ingredients in the production of emulsion products. No special heating is required.

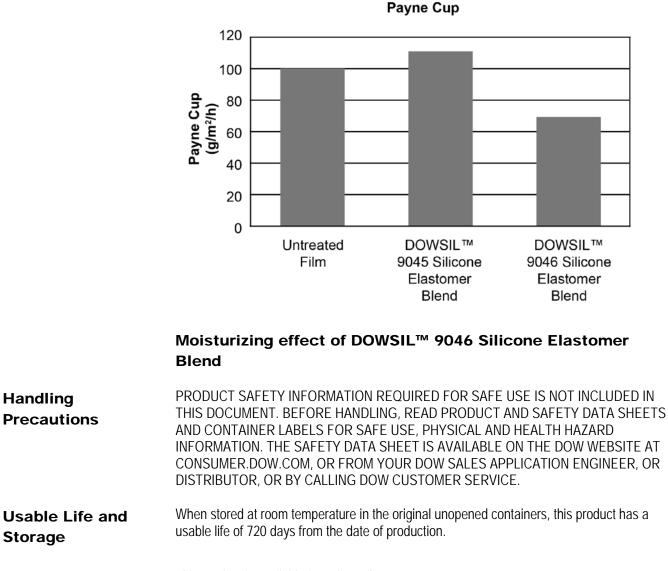

PackagingThis product is available in 15 kg pails.

Samples are available in 1 kg bottles.

Information

Limitations	This product is neither tested nor represented as suitable for medical or pharmaceutical uses.
Health And Environmental Information	To support customers in their product safety needs, Dow has an extensive Product Stewardship organization and a team of product safety and regulatory compliance specialists available in each area.
	For further information, please see our website, consumer.dow.com or consult your local Dow representative.

consumer.dow.com

LIMITED WARRANTY INFORMATION - PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow's sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DOW SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.

DOW DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.

